DIN 931 similar to ISO 4014

Hexagon head bolts


Hexagon head | external hex | with body

Steel 5.6 | zinc-plated | Cr(VI)-free | Metric thread

Further information: DIN-standard has been withdrawn | changed spanner widths for M10, M12, M14 and M22 | screws can be paired with a 6h tolerance-compliant female thread

There is a separation into product classes A and B, with the data sheet showing the largest range of values. For more information, see the technical details of the selected article.







Diameter		b		C		da	d _s	d _w
(d)	I up to 125	I up to 200	I longer than 200	min.	max.	max.	max.	min.
M10	26	32	45	0.15	0.6	11.2	10	14.47
M12	30	36	49	0.15	0.6	13.7	12	16.47
M16	38	44	57	0.20	0.8	17.7	16	22.00
M20	46	52	65	0.20	0.8	22.4	20	27.70
M24	54	60	73	0.20	0.8	26.4	24	33.25

Diameter	е		k	r		s	Pitch	Tool
(d)	min.	min.	max.	min.	max.	min.	(P)	size
M10	17.59	6.11	6.69	0.4	17	16.73	1.50	SW 17
M12	19.85	7.21	7.79	0.6	19	18.67	1.75	SW 19
M16	26.17	9.71	10.29	0.6	24	23.16	2.00	SW 24
M20	32.95	12.15	12.85	0.8	30	29.16	2.50	SW 30
M24	39.55	14.65	15.35	0.8	36	35.00	3.00	SW 36

Length (I)						
nominal size	min.	max.				
45	44.50	45.50				
50	49.50	50.50				
55	54.40	55.60				
60	59.40	60.60				
65	64.40	65.60				
70	69.40	70.60				

Length (I)						
nominal size	min.	max.				
75	74.40	75.60				
80	79.40	80.60				
90	89.30	90.70				
95	94.30	95.70				
100	98.25	101.75				
110	109.30	110.70				

Length (I)					
nominal size	min.	max.			
120	119.30	120.70			
130	128.00	132.00			
140	139.20	140.80			
150	149.20	150.80			



All technical data refer to the measure mm


All technical data refer to the measure mm

DIN 931 similar to ISO 4014

Hexagon head bolts

Hexagon head | external hex | with body

Steel 5.6 | zinc-plated | Cr(VI)-free | Metric thread

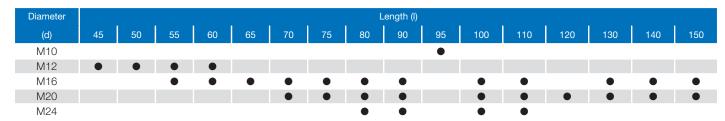

• Combinations available in the eShop | Other sizes on request