


**DIN 965** similar to ISO 7046

## Countersunk bolts

Cross-slot pozidriv

Stainless steel A4 | Cr(VI)-free | Metric thread

Further information: DIN standard has been withdrawn

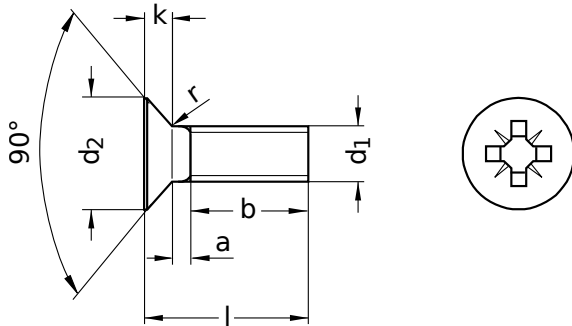

| Diameter (d) | a max. | b nominal size | d <sub>1</sub> nominal size | d <sub>2</sub> nominal size | k max. | r max. | Pitch (P) | Tool size |
|--------------|--------|----------------|-----------------------------|-----------------------------|--------|--------|-----------|-----------|
| M2           | 0.8    | 16             | M2                          | 3.8                         | 1.20   | 0.5    | 0.40      | Z1        |
| M2.5         | 0.9    | 18             | M 2.5                       | 4.7                         | 1.50   | 0.7    | 0.45      | Z1        |
| M3           | 1.0    | 19             | M3                          | 5.6                         | 1.65   | 0.8    | 0.50      | Z1        |
| M4           | 1.4    | 22             | M4                          | 7.5                         | 2.20   | 1.0    | 0.70      | Z2        |
| M5           | 1.6    | 25             | M5                          | 9.2                         | 2.50   | 1.3    | 0.80      | Z2        |
| M6           | 2.0    | 28             | M6                          | 11                          | 3.00   | 1.6    | 1.00      | Z3        |

| nominal size | Length (l) |       |
|--------------|------------|-------|
|              | min.       | max.  |
| 5            | 4.75       | 5.25  |
| 6            | 5.75       | 6.25  |
| 8            | 7.70       | 8.30  |
| 10           | 9.70       | 10.30 |
| 12           | 11.65      | 12.35 |
| 14           | 13.65      | 14.35 |
| 16           | 15.65      | 16.35 |
| 18           | 17.65      | 18.35 |

| nominal size | Length (l) |       |
|--------------|------------|-------|
|              | min.       | max.  |
| 20           | 19.60      | 20.40 |
| 25           | 24.60      | 25.40 |
| 30           | 29.60      | 30.40 |
| 35           | 34.50      | 35.50 |
| 40           | 39.50      | 40.50 |
| 45           | 44.50      | 45.50 |
| 50           | 49.50      | 50.50 |

All technical data refer to the measure mm



**DIN 965** similar to ISO 7046

## Countersunk bolts

Cross-slot pozidriv

Stainless steel A4 | Cr(VI)-free | Metric thread

| Diameter<br>(d) | Length (l) |   |   |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|------------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|
|                 | 5          | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 25 | 30 | 35 | 40 | 45 | 50 |
| M2              | ●          | ● | ● | ●  | ●  | ●  | ●  | ●  | ●  |    |    |    |    |    |    |
| M2.5            | ●          | ● | ● | ●  | ●  | ●  | ●  | ●  | ●  |    |    |    |    |    |    |
| M3              | ●          | ● |   | ●  | ●  | ●  | ●  | ●  | ●  | ●  | ●  |    |    |    |    |
| M4              | ●          | ● | ● | ●  | ●  | ●  |    | ●  | ●  | ●  | ●  | ●  | ●  |    |    |
| M5              |            | ● | ● | ●  | ●  | ●  |    |    | ●  | ●  | ●  | ●  | ●  | ●  | ●  |
| M6              |            |   | ● | ●  | ●  |    | ●  |    | ●  | ●  |    | ●  | ●  |    | ●  |

• Combinations available in the eShop | Other sizes on request

All technical data refer to the measure mm

