


QUICKSERT®

Steel | Type 1433 | flange

Advantages:

- For brittle and ductile plastics such as unsaturated polyester resins (SMC, ZMC), polyurethane and glass-fibre reinforced thermoplastics
- Universal use
- High-strength and torsion-proof threads
- Optimum assembly characteristics

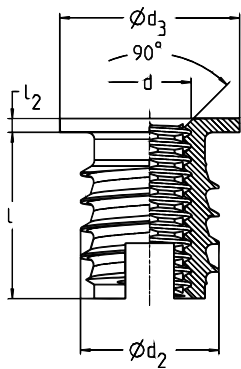

Diameter (d)	Article number	d_3 nominal size	Length (l) nominal size	a min.	l_2	Outer diameter (d2)	L min.
M 4	14331040105	10	9.5	3	1.0	7	10.5
M 5	14331050127	11	11.5	4	1.2	8	12.5
M 6	14331060174	13	16.0	4	1.4	10	17.0
M 8	14331080184	15	17.0	5	1.4	12	18.0

All technical data refer to the measure mm

